




功能描述:

SHB3系列梭阀允许油液从高压油口1和3中更高的一个流向油口2。

技术数据:

工作压力: 350bar
 内泄漏: 5滴/分钟 (350 bar压力下)
 工作环境温度: -40°C to +120°C
 建议油液清洁度: ISO 17/15/13
 油液: 矿物油, 粘度等级为VG32, 46, 68
 流量: 见以下性能曲线

最大流量	型号	插孔	A	B	C	安装扭矩
6 L/min	SHB3-04	C04-3	35.7	4.6HEX	2.5	14-16 Nm
12 L/min	SHB3-08	C08-3	40.6	25.4	12.7	47-54 Nm
23 L/min	SHB3-10	C10-3	47.0	27.0	12.7	74-82 Nm

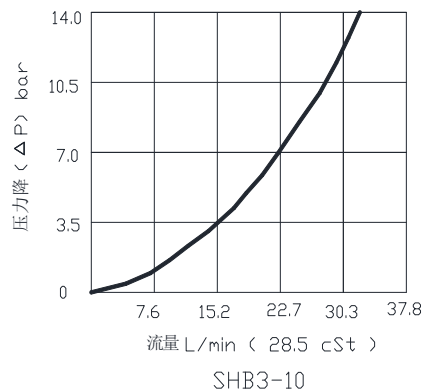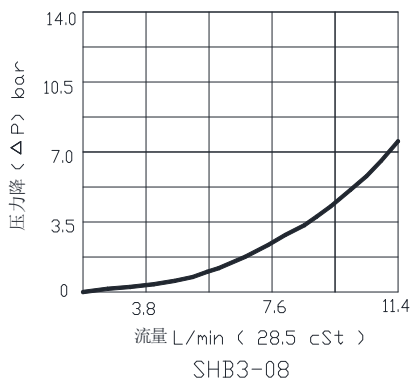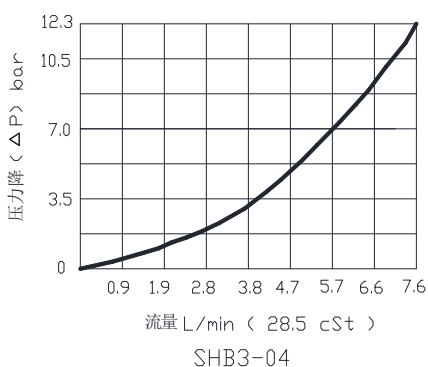

SHB3

08

N

①

②

③

① 产品系列

SHB3 = 梭阀,
钢球密封, 3通

② 规格

04 = 7/16-20 UNF
 08 = 3/4-16 UNF
 10 = 7/8-14 UNF

③ 密封材料

N = 丁晴橡胶
 V = 氟橡胶